















# DirectTex® Softimage Elastico®

Fields of application

**.02 .04 .05 .06 .07**

## Specifications

	599190 129
	100 % polyester knit fabrics PVC-free, recyclable
	ca. 160/ 252/ 320 cm ca. 63/ 99/ 126 inch other widths available on request
	B-s1, d0    DIN EN 13501-1 M1            NF P 92 503 - 507
	ca. 175 g/m <sup>2</sup> ca. 5.2 oz/yd <sup>2</sup>
	ca. 0.55 mm ca. 550 µm
	rolls 50/ 100 m 55/ 109 yd
	warp:    493 N    / 427 N* weft:    845 N    / 964 N* DIN EN ISO 13934-1 - max. tensile strength
	warp:    42.7 %   / 55.8 %* weft:    90.5 %   / 79.0 %* DIN EN ISO 13934-1 - max. tensile elongation
	warp:    29.9 N    / 40.3 N* weft:    34.4 N    / 32.3 N* DIN EN ISO 13937-2 - trouser tear propagation
	blank:    6 DIN EN ISO 105-B02
	warp:    2.8 %    / 12.6 %* weft:    13.3 %   / 10.9 %* DIN EN 14704-1
	cold, ultrasonic cut
	crease-resistant, stretchable

\* only for 252 cm (100 inch) width

## Printing methods

print	UV	Latex	Dyesub
Inside	•		•
Outside			

## Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	0,5 %	0,0 %	
190°C	0,5 %	0,5 %	•
200°C	0,5 %	0,8 %	
210°C	0,6 %	1,2 %	

## Certifications






## DirectTex® Softimage Elastico

Fields of application

**.02 .04 .05 .06 .07**

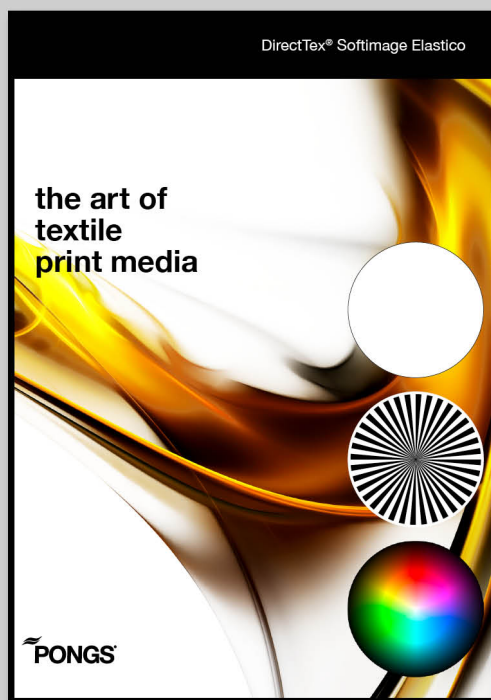

Ref.-Nr.: 599190 129 | Preview print sample



**PONGS Technical Textiles GmbH**

Bahnhofstraße 21  
07919 Pausa-Mühltrorf  
Germany

Phone +49 36645 350-0  
salestt@pongs.de  
www.pongs.com

We reserve the right for technical modifications.  
The above mentioned details are non-binding.  
A tolerance of  $\pm 5\%$  is valid. Effective: 2019/06