










# DirectTex<sup>®</sup>

## PES Theatre Soft

Fields of application

**.02 .04 .05 .06 .07**

### Specifications

-  **REF.** 550290 120
-  100 % polyester  
weaves fabrics  
PVC-free, recyclable
-  ca. 310/ 505 cm  
ca. 122/ 199 inch  
other widths available on request
-  B-s1, d0    DIN EN 13501-1  
M1            NF P 92 503 - 507
-  ca. 315 g/m<sup>2</sup>  
ca. 9.3 oz/yd<sup>2</sup>
-  ca. 0.55 mm  
ca. 550 µm
-  rolls  
50 m  
55 yd
-  blank: 8  
DIN EN ISO 105-B02
-  ultrasonic cut

### Printing methods

print	UV	Latex	Dyesub
Inside	•	•	•
Outside	•	•	•

### Article shrinkage (50 sec hold up time)

	shrinkage in cross direction	shrinkage in longitudinal direction	recommended fixing temperature
180°C	1,1 %	2,1 %	•
190°C	2,1 %	2,3 %	
200°C	2,4 %	3,3 %	
210°C	2,6 %	5,8 %	

### Certifications






## DirectTex® PES Theatre Soft

Fields of application

.02 .04 .05 .06 .07

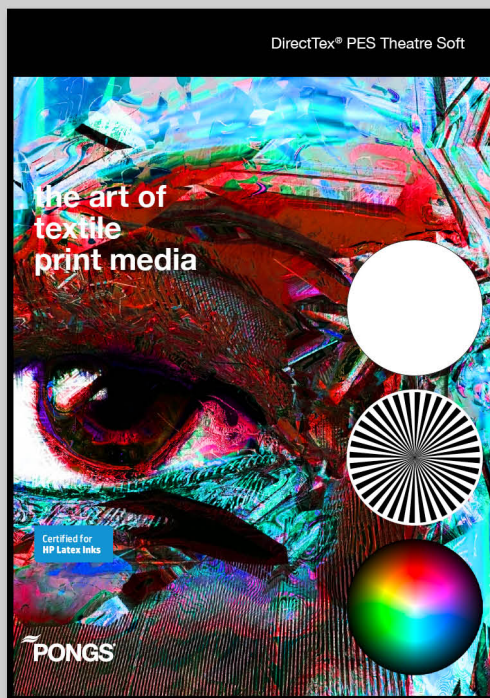

Ref.-Nr.: 550290 120 | Preview print sample



### PONGS Technical Textiles GmbH

Bahnhofstraße 21  
07919 Pausa-Mühltröf  
Germany

Phone +49 36645 350-0  
salestt@pongs.de  
www.pongs.com

We reserve the right for technical modifications.  
The above mentioned details are non-binding.  
A tolerance of  $\pm 5\%$  is valid. Effective: 2019/06