



CANOPY LIGHT

This surface-mounted canopy light is the ideal luminaire for gas stations, parking garages and work floors. Built with a die-cast white aluminum housing, our canopy light mounts to standard junction boxes and offers soft, uniform, flicker-free light. No humming! Rated IP65 for damp/wet use and available in four color temperatures, its long lifespan and high efficacy save energy and money. Easy to install and operate.

Features:

- 150W, Input voltage 100-277 VAC
- Premium high-lumen efficiency (132-140 lm/W)
- Available in 4 CCTs (4000K, 4500K, 5000K, 5700K)
- Rated IP65 for wet location and outdoor use
- 80+ CRI
- 5-year limited warranty

Construction:

- Precision die-cast aluminum housing
- Excellent heat management
- Standard white casing (custom colors available)
- Mounts to standard junction boxes for quick, easy installation
- 520 mm (20.5 in.) square with rounded corners
- Frosted lens



IP65

ORDERING GUIDE

Category	CRI	Voltage	Wattage	Color Temperature	
CANOPY	80	100-277 VAC	150		
CANOPY - Canopy	80 - 80+ CRI Static White	100-277 VAC - 100-277 VAC	150 - 150 W	40 - 4000K	50 - 5000K
				45 - 4500K	57 - 5700K

SPECIFICATIONS

Operating Voltage	100-277 VAC 50/60Hz	Carton Weight	8.6 kg
Power Factor	≥0.9	Carton Size	560 x 560 x 160 mm
Input Power	150 W	Ambient Temperature	-40° C to 45° C
Color Temperatures	4000K, 4500K, 5000K, 5700K	Housing Material	Aluminum alloy
Beam Angle	110°	Housing Color	White or custom
Lumen Output	19800-21000 lm	Lens	Frosted lens
Efficiency	132-140 lm/W	Protection Rating	IP65
CRI	80+ CRI	Warranty	5 years
THD	≤20%	Certifications	UL, DLC

AVAILABLE COLOR TEMPERATURES




REV: 06OCT2021

Data sheet subject to change without notice.




DIMENSIONS / LUMINOUS INTENSITY DISTRIBUTION CURVE / AVERAGE ILLUMINANCE EFFECTIVE FIGURE

DIMENSIONS

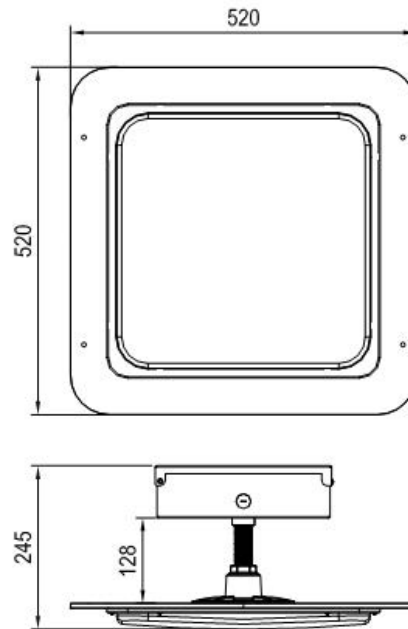

LUMINOUS INTENSITY DISTRIBUTION CURVE

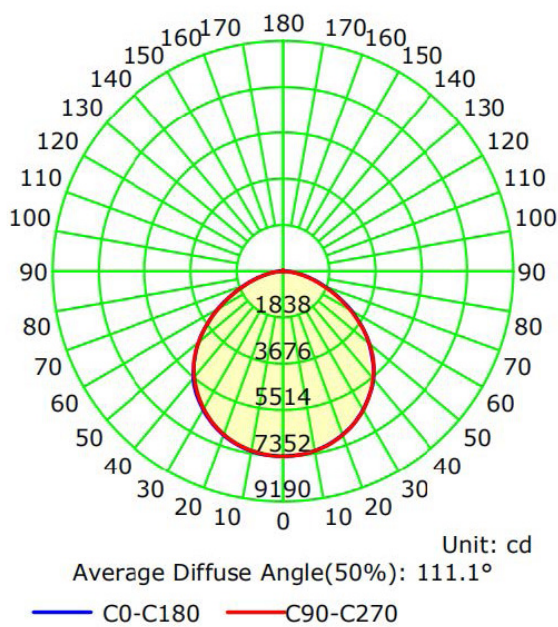

AVERAGE ILLUMINANCE EFFECTIVE FIGURE

